


# FLP SERIES LOW PROFILE PLATFORMS

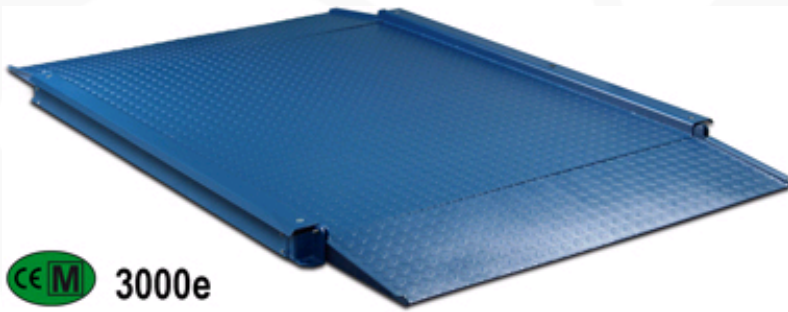


FLP: platforms for weighing trolleys and pallet trucks

Low profile platforms, with painted steel chequered structure and load surface. Suitable for creating scales and electronic weighing systems for all types of industrial and commercial applications. Ideals for weighing trolleys and pallet trucks thanks to the on/off ramps on both the sides and the sideboards. Standard version is with approved load cell. Available also with CE-M 3000e approval.

## DIMENSIONS

- Dimensions in mm of the loading surface:

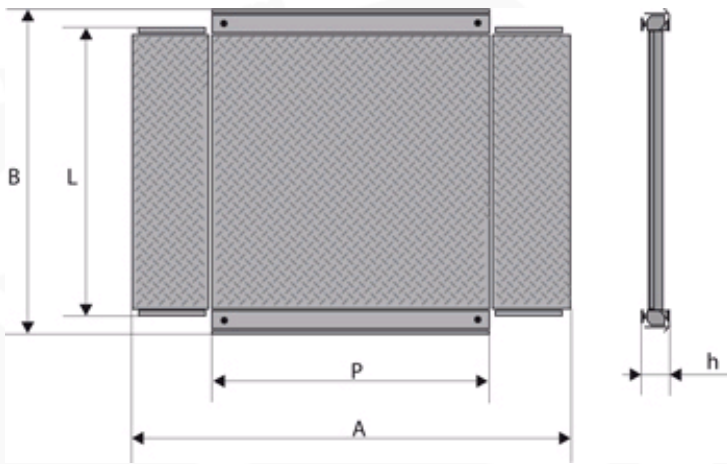

Mod./Dim.	A	B	L	P	H
FLPA	1950	1425	1000	1250	52
FLPB	2200	1675	1250	1500	52

## MAIN FEATURES

- Fitted with 4 aluminium shear-beam load cells, OIML R60 approved, each with 350 Ohm input resistance and IP67 protection.
- Chequered steel structure and load surface, oven-fire painted, RAL 5007 blue.
- Adjustable, anti-shock jointed feet and level.
- Power supply from 5 to 15 Vdc.
- Hermetic junction box, IP67 wiring with screened 5m long cable with a connector for connection to the indicator.
- Fitted with sideboards and double on/off ramp.

## OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- Connection to the indicator and calibration with CE-M 3000e single range.

## Available versions

Code	Dimensions (LxPxH)	Max Capacity kg	CE-M Division g (*)	Division kg
FLPA	1000x1250x52	3000	1	1
FLPB	1250x1500x52	3000	1	1

(\*) These divisions are obtainable only with the relative options

## Weight Indicators and Accessories

Code	Description
DFWL	High performance multifunction weight indicator, 5-key keypad, LCD 25mm backlit display, power supply through 4 AA batteries, IP54 case, RS232 RJ connector, fitted with fixing bracket and 12 Vdc external power adapter.
DFWLKI	Multifunction weight indicator, in IP68 stainless steel, with 17-key easy to use keypad.
DFTL	Remote control for use up to 8m, configurable as a single tare key or four keys
CSP42I	STAINLESS steel support column for the DFW, 3590, TRS series' indicators. Easy to install and to clean. Adjustable feet, guaranteeing the maximum stability.

## Options only available at time of order

Code	Description
ECEM1C	CE-M 3000e initial stamping for class III or IIII scales with capacity from 1501 to 6000 kg

## Configuration Example

FLPA platform, connected to the DFWL indicator installed on the CSP42I column and the DFTL control, for use the scale at distance.

